
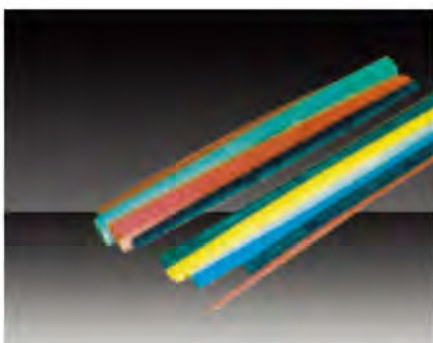
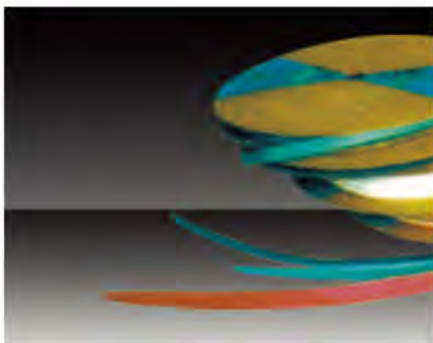


HEAT - SHRINKABLE TUBINGS

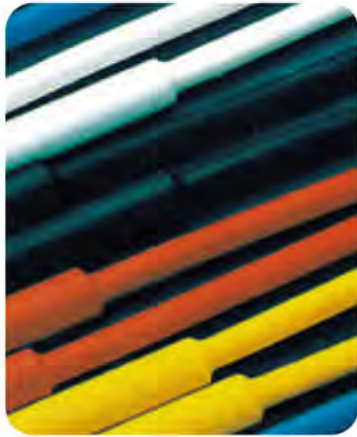

■ **Function: 1.wire coat and insulation.**

2.make the joint of terminal block and wire insulated.

3.divide the colors.

4.water-proof.

5.protection and insulation of insitors and electrical capacitors.

Standard color: black,white,red,blue,yellow, green, brown ,grey, orange and purple.

Apporved date:

UL2240,105℃,660V,VW-1,CSA,125℃,660V,OFT

F: 105℃(UL,CSA)

F2: 125℃(UL,CSA)

F32: 125℃(UL,CSA)

ITEM NO.	AS SUPPLIED		AFTER SHRINKAGE		PACKING (M/ROLL)
	IN-DIAMETER	THICKNESS	I.D(mm)	THICKNESS	
DL-1	1.0	0.2±0.05	0.5	0.4±0.05	400
DL-1.5	1.5	0.2±0.05	0.75	0.4±0.05	300
DL-2	2.0	0.25±0.05	1.0	0.45±0.1	200
DL-2.5	2.5	0.25±0.05	1.25	0.45±0.1	
DL-3	3.0	0.25±0.05	1.5	0.45±0.1	100
DL-3.5	3.5	0.25±0.05	1.75	0.45±0.1	
DL-4	4.0	0.25±0.05	2.0	0.45±0.1	
DL-5	5.0	0.35±0.05	2.5	0.55±0.1	
DL-6	6.0	0.35±0.05	3.0	0.55±0.1	
DL-7	7.0	0.35±0.05	3.5	0.55±0.1	
DL-8	8.0	0.35±0.05	4.0	0.55±0.1	
DL-9	9.0	0.35±0.05	4.5	0.55±0.1	
DL-10	10.0	0.35±0.05	5.0	0.60±0.1	
DL-11	11.0	0.35±0.05	5.5	0.60±0.1	
DL-12	12.0	0.35±0.1	6.0	0.70±0.1	50
DL-13	13.0	0.35±0.1	6.5	0.70±0.1	
DL-14	14.0	0.35±0.1	7.0	0.70±0.1	
DL-15	15.0	0.35±0.1	7.5	0.70±0.1	
DL-16	16.0	0.35±0.1	8.0	0.70±0.1	
DL-17	17.0	0.35±0.4	8.5	0.70±0.1	
DL-18	18.0	0.4±0.1	9.0	0.80±0.1	
DL-20	20.0	0.5±0.1	10.0	0.90±0.1	
DL-22	22.0	0.5±0.1	11.0	0.90±0.1	25
DL-25	25.0	0.4±0.1	12.5	0.90±0.1	
DL-28	28.0	0.5±0.1	14.0	0.90±0.1	
DL-30	30.0	0.5±0.1	15.0	1.00±0.2	
DL-35	35.0	0.5±0.1	17.5	1.00±0.2	
DL-40	40.0	0.5±0.1	20.0	1.00±0.2	
DL-50	50.0	0.5±0.1	25.0	1.00±0.2	
DL-60	60.0	0.6±0.1	30.0	1.20±0.2	
DL-70	70.0	0.6±0.1	35.0	1.20±0.2	25
DL-80	80.0	0.6±0.1	40.0	1.20±0.2	
DL-90	90.0	0.6±0.1	45.0	1.30±0.2	
DL-100	100.0	0.7±0.1	50.0	1.30±0.2	

SPIRAL WRAPPING BAND


■ **Material:** Made from PE.

Usage: fix one end with safety belt first, then circle the wires clockwise to make them tighten.

Application: a protection wear for electric wires, and make them insulation and look nice.



ITEM NO.	IN-DIAMETER	D1	Screw pitch W	WRAPPING RANGE (MM ϕ)	PACKING
DS-6	4	6	7.0	4×50	10m
DS-8	6	8	10.8	6×60	
DS-10	7.5	10	11.4	7.5×60	
DS-12	9	12	13.9	9×65	
DS-16	13	16	15.0	12×70	
DS-20	16	20	18.2	15×100	
DS-25	21	25	19.6	20×130	

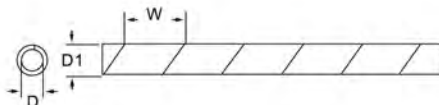

ECM-TYPE WIRE MARKERS

■ **Material:** Soft PVC, concave conversed shape, no code in sleeve, stasticity of in-diameter.

How to use: Peel each hack lightly

Feature: Suitable any size, special length and marking is available to order.






ITEM NO.	SUITABLE WIRE	IN-DIAMETER	LENGTH	N O.	PACKING
GEC-0	18AWG	2.0-3.0	3.5		1000PCS
	16AWG				
	0.75				
GEC-1	0.75	3.0-5.2	4.0	0.9	1000PCS
	1.25				
	2.0				
GEC-2	3.0	3.6-7.4	5.0	A-Z +, -, ÷	500PCS
	3.5				
	5.5				
GEC-3	8.0	5.2-10.0	5.0		250PCS
	14.0				
	22.0				

SELF-ADHESIVE TIE MOUNTS



- **Material:** Nylon66,94V-2,certificated by UL,the back attached sponge glue imported.
- Usage:** Peel the sponge glue and stick on the wall then, bundle the wire with cable ties.
- Application:** for bundling wires and other things save time and convenient,used for the wall which can't be made a hole in.


ITEM NO.	L×W	H (mm)	T (mm)	SCREW HOLE(mm)	PACKING
TM-20	20×20	6.1	5.0	2.9	100PCS
TM-25	25×25	7.5	6.2	3.5	
TM-30	30×30	8.7	6.4	4.5	
TM-40	40×40	6.4	10.8	/	
AAM-1	19×19	4.6	4.4	/	
AAM-2	28×28	6.4	5.4	5.5	

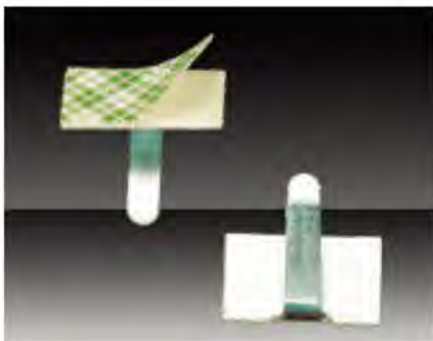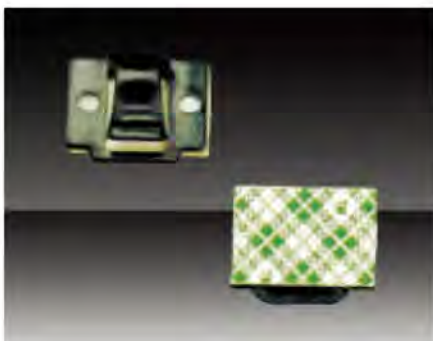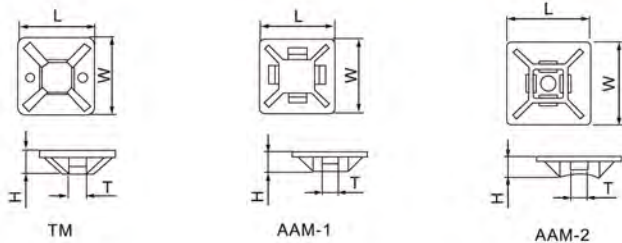


SELF-ADHESIVE TIE MOUNTS

- **Material:** Nylon66,(C-1;C-2).certificated by UL, high grade steel or stainless steel ; sponge double side sticker.
- Usage:** remove the sticker protect paper, stick the clip on the wall, then put the wire through the clip.
- Character:** convenient for use, it is especial suit for the no-holes of wall.

ITEM NO.	L×W	MATERIAL	Adhesive	PACKING
C-1	17×12	PA66	3M	100PCS
C-2	20×14	PA66	3M	
CB-3	20×10	stainless steel or steel	3M	
CB-4	25×15		3M	
CB-5	30×20		3M	

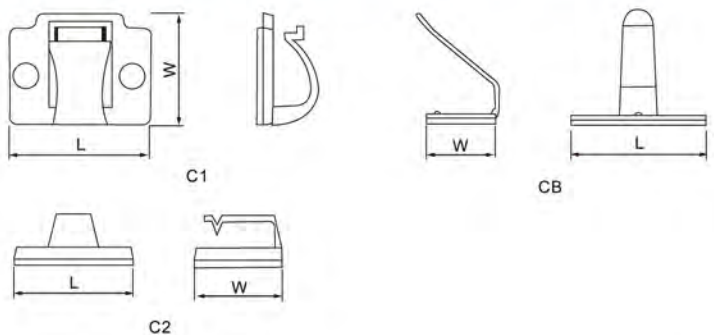


R TYPE CABLE CLAMPS



■ Material: Nylon 66 94V-2 agreed by UL.
 Usage: put cable in, fix by screw.

ITEM NO.	A(mm)	B(mm)	C(mm)		D(mm)	PACKING
			MM	INCH		
DL-1/8R	9.5	9.6	3.2	1/8"	19.8	100PCS
DL-3/16R	9.6	9.6	4.8	3/16"	19.8	
DL-1/4R	12.0	10.0	6.35	1/4"	22.0	
DL-5/16R	12.0	10.0	7.9	5/16"	22.0	
DL-3/8R	12.5	12.0	9.5	3/8"	24.0	
DL-1/2R	15.2	12.0	12.7	1/2"	31.0	
DL-5/8R	18.2	12.0	15.8	5/8"	34.3	
DL-3/4R	18.2	12.0	19.4	3/4"	35.0	
DL-1R	22.0	12.0	25.4	1"	43.0	
DL-17/16R	24.0	12.0	27.5	17/16"	50.0	
DL-5/4R	26.2	12.0	31.8	11/4"	46.2	
DL-3/2R	30.0	12.0	36.7	11/2"	50.0	


CABLE TIE HOLDER

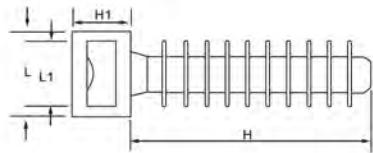


ITEM NO.	H	H1	W	L	L1	PACKING
CH-8	37	6.0	10	12.7	9.7	100PCS

EXPAND PLUG


■ Material: made of PE.
 Color: White, Grey.

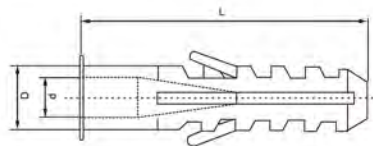

ITEM NO.	L(mm)	D(mm)	IN-DIAMETER d(mm)	PACKING
EN-06	29.8	6.0	4.9	1000PCS&100PCS
EN-08	38.6	7.9	5.3	
EN-10	42.7	9.9	5.8	1000PCS&100PCS
EN-12	47.9	11.6	6.3	

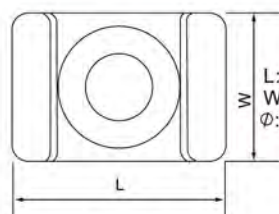




CTH-2

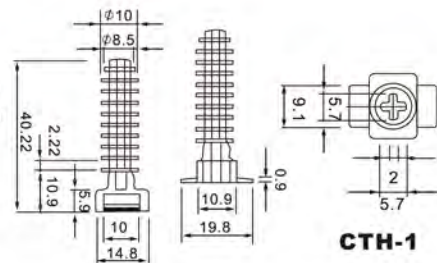

CTH-1

WIRING DUCT(SLOTTED)

■ **Material:** made from PVC(grey),good insulation and heat-resisting up to 85°C.
Struction: made up of duct bottom and lid, with two out-holes designd at the bottom.

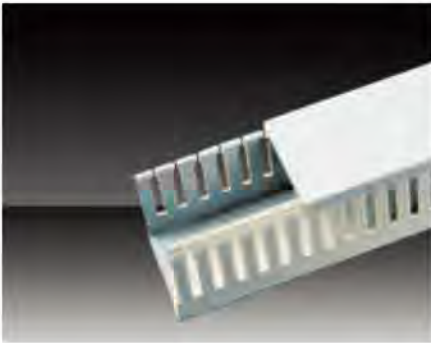



ITEM NO.	H×W	CONTAINED WIRE(1.52)	LENGTH
PXC-2015	20×15	5-10PCS	2M
PXC-2020	20×20	10-15PCS	
PXC-2025	20×25	10-20PCS	
PXC-2525	25×25	10-25PCS	
PXC-2545	25×45	25-10PCS	
PXC-3015	30×15	5-15PCS	
PXC-3020	30×20	10-20PCS	
PXC-3025	30×25	15-25PCS	
PXC-3030	30×30	20-30PCS	
PXC-3035	30×35	30-45PCS	
PXC-3040	30×40	35-50PCS	
PXC-3050	30×50	45-60PCS	
PXC-3525	35×25	25-35PCS	
PXC-3535	35×35	40-55PCS	
PXC-4025	40×25	20-40PCS	
PXC-4030	40×30	35-50PCS	
PXC-4040	40×40	45-55PCS	
PXC-4525	45×25	25-40PCS	
PXC-4535	45×35	40-55PCS	
PXC-4545	45×45	60-70PCS	
PXC-5025	50×25	25-45PCS	
PXC-5030	50×30	30-55PCS	
PXC-5035	50×35	50-60PCS	
PXC-5040	50×40	60-70PCS	
PXC-5045	50×45	70-85PCS	
PXC-5050	50×50	90-100PCS	
PXC-5055	50×55	100-110PCS	
PXC-5060	50×60	95-105PCS	
PXC-5080	50×80	180-200PCS	
PXC-50100	50×100	220-250PCS	
PXC-6525	65×25	60-70PCS	
PXC-6545	65×45	100-110PCS	
PXC-6565	65×65	180-200PCS	
PXC-8035	80×35	140-160PCS	
PXC-8045	80×45	160-180PCS	
PXC-8050	80×50	180-200PCS	
PXC-8055	80×55	200-220PCS	
PXC-8080	80×80	240-290PCS	
PXC-80100	80×100	280-350PCS	
PXC-100100	100×100	300-400PCS	



PIN BUSBAR FOR MINI CIRCUIT BREAKER





DZ47-1P

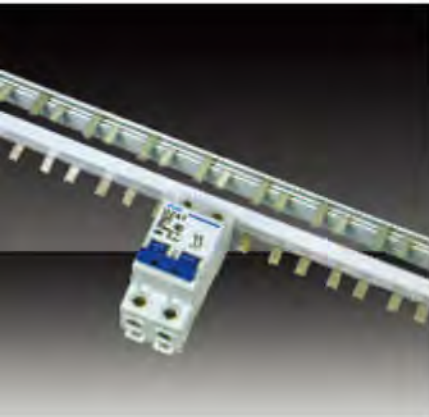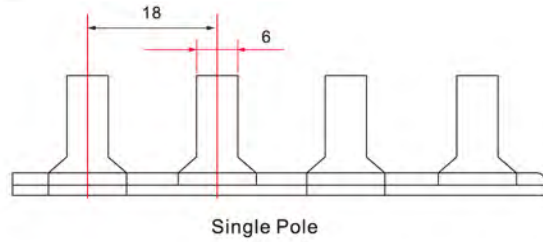


DZ47-2P

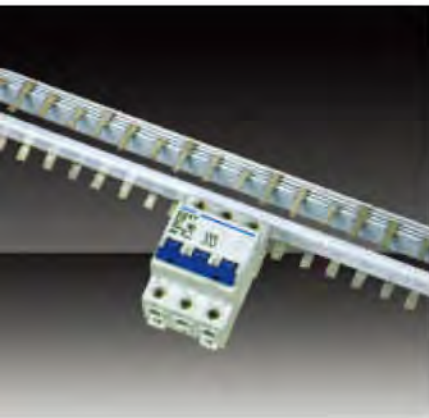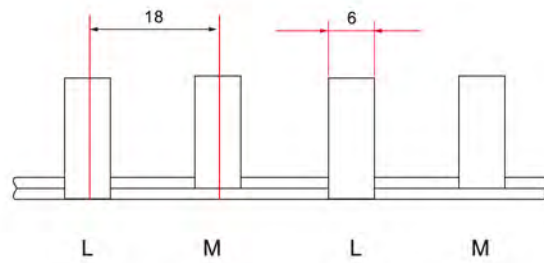


DZ47-3P

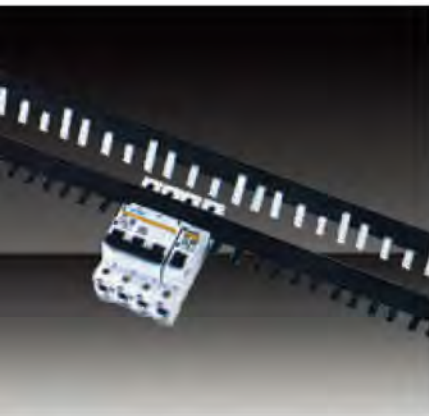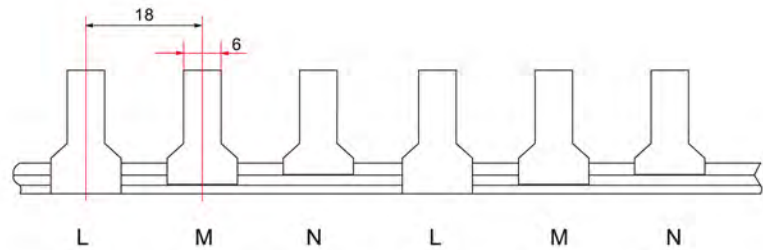



DZ47-4P

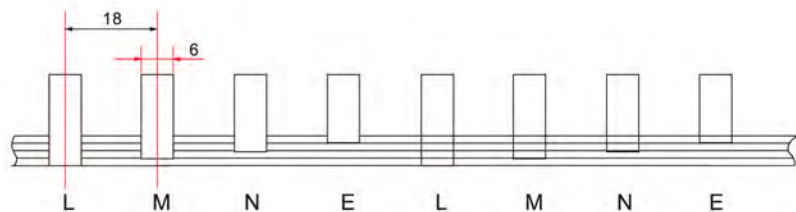



SPADE BUSBAR FOR MINI CIRCUIT BREAKER

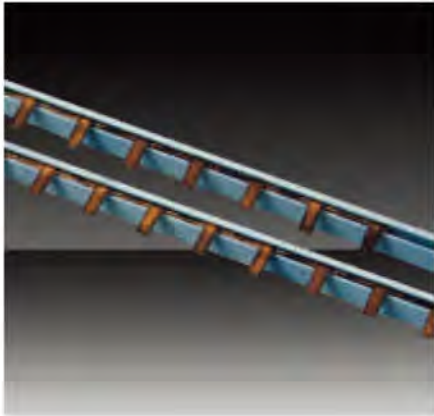



FBB-1P

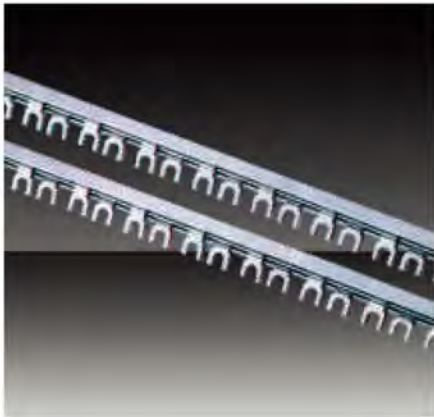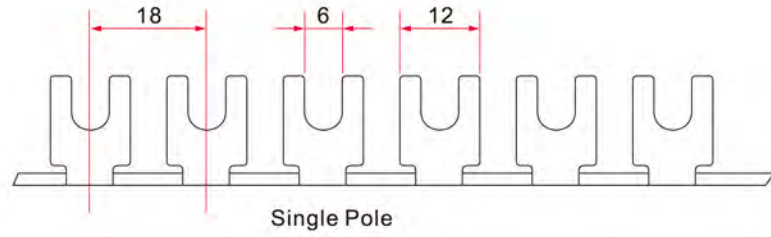


FBB-2P

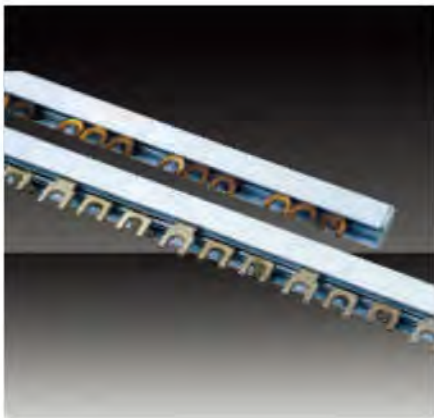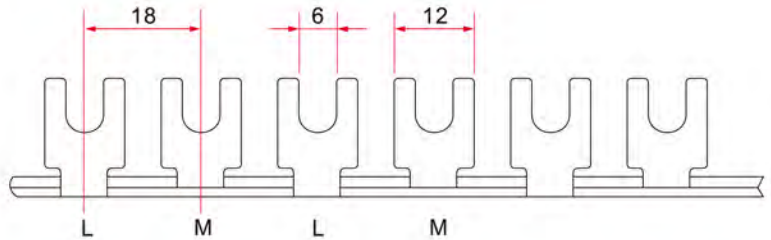


FBB-3P

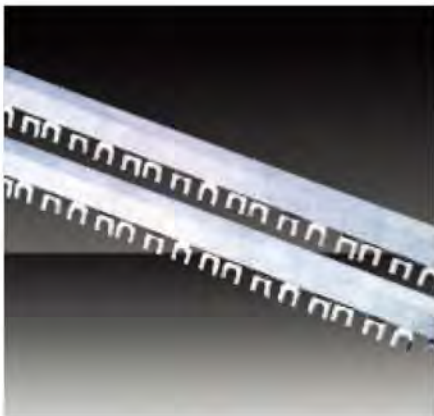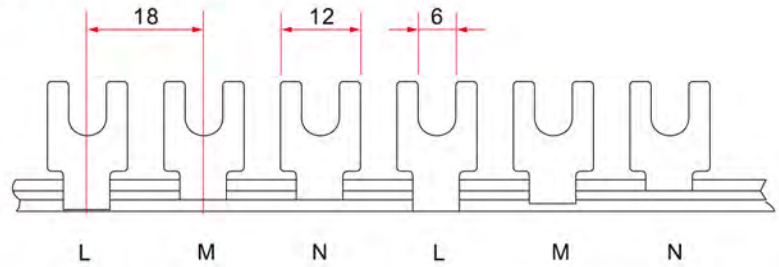




FBB-4P

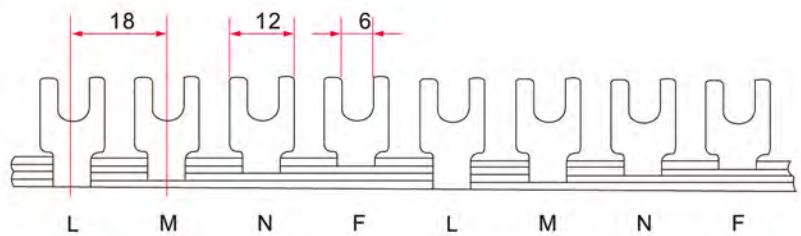




METAL RAILS

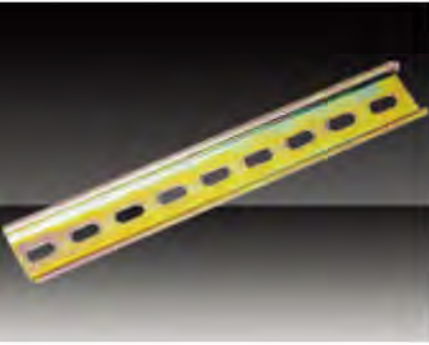



DG-001

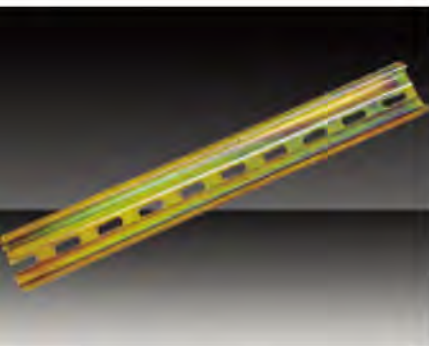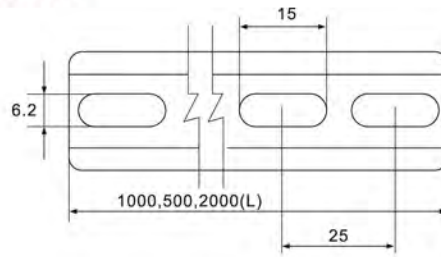



DG-004

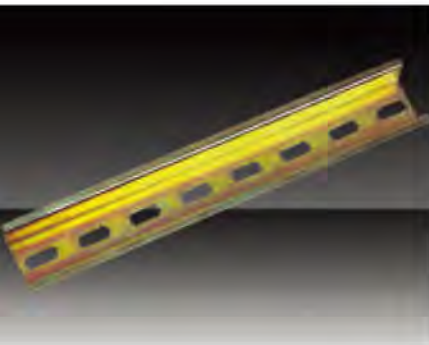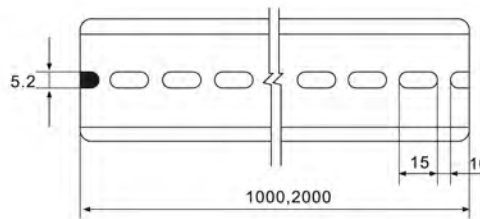



DG-007

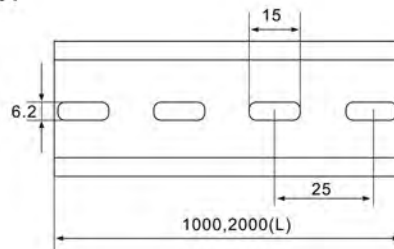

DL-012

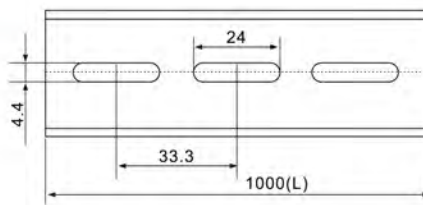



DL-011

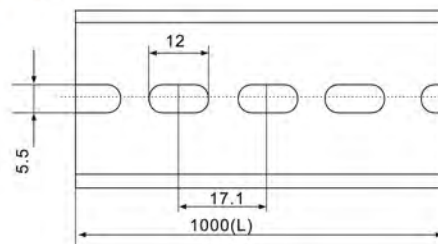




METAL RAILS






DL-013

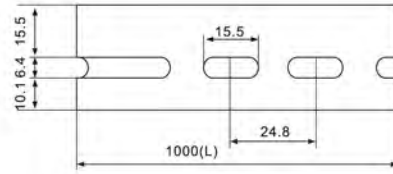



DL-015

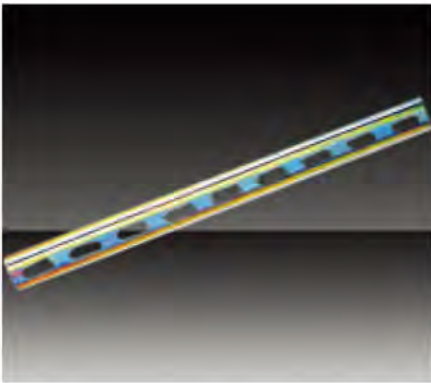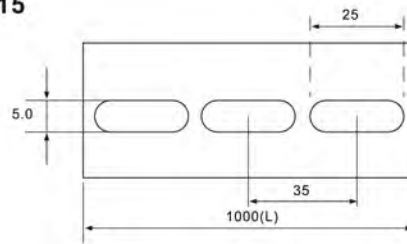

DG-008

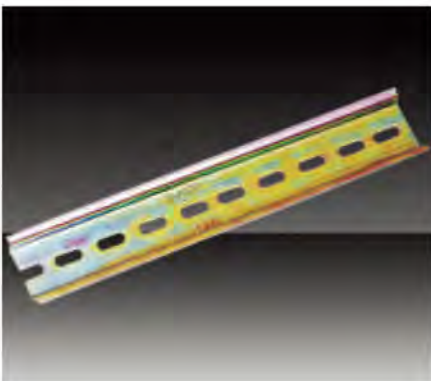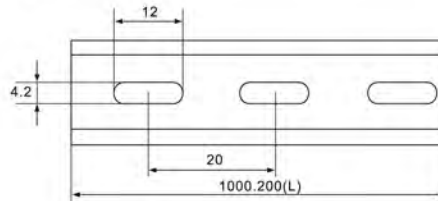

DG-003

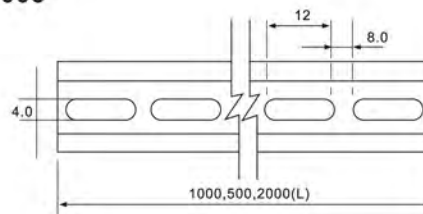

工具

CRIMPING TOOLS

**DL-06WF**

Frame only 8"(203mm)
For wire-end ferrules!
Capacity:0.5-6.0mm²
AWG:20-10

**DL-16**

Point press type
Frame only 270mm
For non-insulated cable links
Capacity:1.25-16 mm²
AWG:16-5

**DL-731**

Both insulated links and non-insulated links are available
Size:9"
Hardness:50-60°
AWG:22-10

**DL-60A**

Crimping section:chromium steel
Plastic grip:soft pvc
Cutting copper and aluminium cable
Up to 60mm²

**Item No: YQ-70**

Crimping range:4-70mm²
Crimping force:8T
crimping type:hexagon crimping
stroke:10mm
length:approx.310mm
weight:approx.2.80kg
package:plastic box
weight of box:approx.0.56kg
Accessories:
crimping dies:4,6,8,10,16,25,35,50,70mm²
Sealing O-ring:one set

**Item No: CYO-400B** safety system inside

crimping range:50-400mm²
Crimping force:13T
crimping type:hexagon crimping
stroke:38mm
length:approx.370mm
weight:approx5.70kg
package:steel case
Accessories:
Female dies:50,70,95,120,150,185,240.300.400mm²

